

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
5 February 2004 (05.02.2004)


PCT

(10) International Publication Number  
WO 2004/011843 A1

- (51) International Patent Classification<sup>7</sup>: F16M 11/32, 11/14
- (21) International Application Number: PCT/IT2002/000503
- (22) International Filing Date: 30 July 2002 (30.07.2002)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): LINO MANFROTTO + CO S.P.A. [IT/IT]; Via Sasso Rosso, 19, I-36061 Bassano del Grappa (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): SPEGGIORIN, Paolo [IT/IT]; Via Colombara, 6A, I-36065 Mussolente (VI) (IT).
- (74) Agents: FABRIS, Stefano et al.; c/o Cantaluppi & Partners S.r.l., Via Mattotti, 26, I-35137 Padova (IT).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,

[Continued on next page]

(54) Title: A TRIPOD FOR SUPPORTING APPARATUS IN GENERAL AND, IN PARTICULAR, FOR OPTICAL OR PHOTOGRAPHIC APPARATUS AND THE LIKE

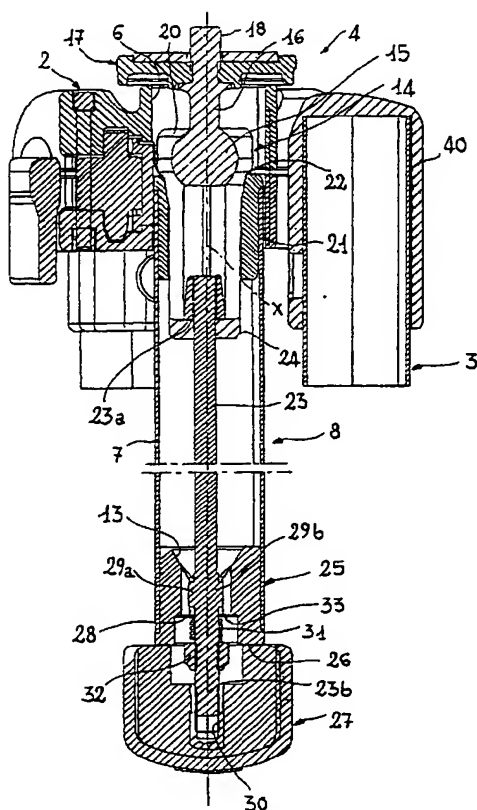

(57) Abstract: A tripod (1) for supporting apparatus in general and, in particular, for optical or photographic apparatus and the like is described and comprises a spider (2), a pillar (8) arranged to be housed with a stem (7) thereof in a through-hole (6) formed through the spider (2), and a head (4) arranged for receiving the apparatus and connected to a first end (7a) of the pillar (8); in the closed-up condition, that is, in the most compact condition of the tripod (1), the head (4) is at least partially housed inside the through-hole (6).

WO 2004/011843 A1



TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

**Declaration under Rule 4.17:**

— as to the identity of the inventor (Rule 4.17(i)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE,

**Published:**

— with international search report

(48) Date of publication of this corrected version:

3 March 2005

(15) Information about Correction:

see PCT Gazette No. 09/2005 of 3 March 2005, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
5 February 2004 (05.02.2004)

PCT

(10) International Publication Number  
WO 2004/011843 A1

- (51) International Patent Classification<sup>7</sup>: **F16M 11/32**,  
11/14
- (21) International Application Number:  
PCT/IT2002/000503
- (22) International Filing Date: 30 July 2002 (30.07.2002)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **LINO MANFROTTO + CO S.P.A.** [IT/IT]; Via Sasso Rosso, 19, I-36061 Bassano del Grappa (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SPEGGIORIN, Paolo** [IT/IT]; Via Colombara, 6A, I-36065 Mussolente (VI) (IT).
- (74) Agents: **FABRIS, Stefano et al.**; c/o Cantaluppi & Partners S.r.l., Via Mattotti, 26, I-35137 Padova (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: A TRIPOD FOR SUPPORTING APPARATUS IN GENERAL AND, IN PARTICULAR, FOR OPTICAL OR PHOTOGRAPHIC APPARATUS AND THE LIKE

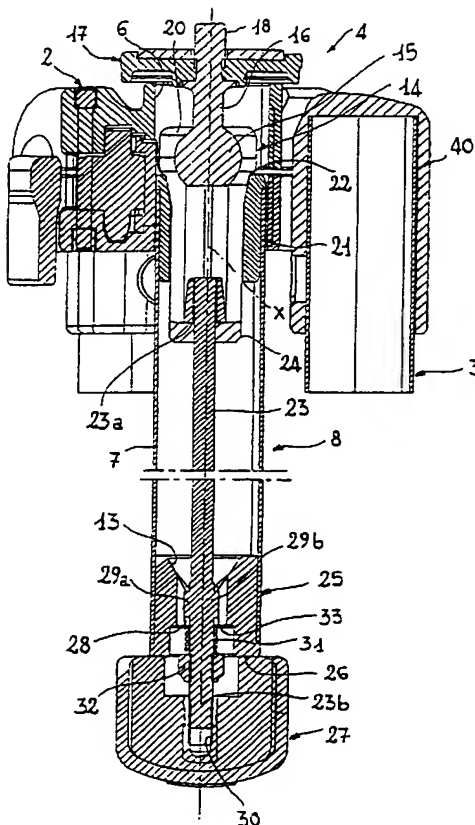

(57) Abstract: A tripod (1) for supporting apparatus in general and, in particular, for optical or photographic apparatus and the like is described and comprises a spider (2), a pillar (8) arranged to be housed with a stem (7) thereof in a through-hole (6) formed through the spider (2), and a head (4) arranged for receiving the apparatus and connected to a first end (7a) of the pillar (8); in the closed-up condition, that is, in the most compact condition of the tripod (1), the head (4) is at least partially housed inside the through-hole (6).



**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

A tripod for supporting apparatus in general and, in particular, for optical or photographic apparatus and the like

#### Technical field

The present invention relates to a tripod for supporting apparatus in general  
5 and, in particular, for optical or photographic apparatus and the like, according to the preamble to main Claim 1.

In this context, the term "tripod" is used in its widest sense to mean a support with three or more legs converging in a spider for the positioning and mounting of a head with which the desired apparatus can in turn be associated.

#### 10 Technological background

Within the specific technical field, it is desirable to provide tripods which can satisfy the conflicting requirements of minimized size when closed up and of maximized positioning height when the tripod is opened out. A constructional limitation typical of known tripods results from the fact that each leg of the tripod is  
15 articulated to the spider by means of a pin extending through the first leg section; this obstructs the further sections which are fitted telescopically in the first, affecting their useful length and limiting their extension.

A first known tripod solution which pursues this aim is described in European patent application EP 1122486. In order to maximize the positioning  
20 height of the opened-out tripod, this solution maximizes the length of each leg section of the tripod by using an articulation of the legs to the spider which is achieved by opposed appendages projecting radially from a cap fitted on the top of the leg section articulated to the spider. This solution affords the advantage of making the best use of the telescopic lengthening of the legs, permitting optimal  
25 utilization of the space inside the telescopic extensions.

However, even with this solution, the tripod is still quite bulky in the closed-up condition.

#### Description of the invention

The problem underlying the present invention is that of providing a tripod  
30 for supporting apparatus in general and, in particular, for optical or photographic apparatus and the like, which is designed structurally and functionally to overcome the limitations set out above with reference to the prior art cited.

This problem is solved by the present invention by means of a tripod for supporting apparatus in general, formed in accordance with the appended claims.

#### 35 Brief description of the drawings

The characteristics and the advantages of the invention will become clearer from the detailed description of a preferred embodiment thereof, illustrated by way of non-limiting example, with reference to the appended drawings, in which:

- Figure 1 is a perspective view of a tripod formed in accordance with the present invention, in a first operative condition in which it is opened out to the maximum extent,
- Figure 2 is a perspective view of the tripod of Figure 1 in a second, closed-up, most compact operative condition,
- Figure 3 is a sectioned side elevational view of a detail of the tripod of Figure 2,
- Figure 4 is a view of a second detail of the tripod of Figure 2, from above and in section, and
- Figure 5 is a sectioned side elevational view of a third detail of the tripod of Figure 2.

#### Preferred embodiment of the invention

In Figures 1 and 2, a tripod for supporting apparatus in general and, in particular, for optical or photographic apparatus and the like, formed in accordance with the invention, is generally indicated 1.

The term "tripod" is intended to define below supports for apparatus, preferably cinematographic or photographic apparatus, without limitation of the number of legs.

The tripod 1 includes a spider 2 with a principal axis X, and comprising three lobes 2a, 2b, 2c in which three respective legs, all indicated 3, converge and are articulated in the manner described below. Each leg 3 is formed with a telescopic structure of known type, with four sections 3a, 3b, 3c, 3d, the relative positioning of which is adjustable by means of clamps, all indicated 5. A sleeve 40 is fitted and fixed like a cap on each first section 3a and bears a radial appendage 34 which can be housed so as to be rotatable but restrained axially in a respective seat 36 formed in the corresponding lobe 2a, 2b or 2c. For the axial restraint of the appendage 34 in the seat 36, both have a double conical shape defining a channel 41 and an annular cusp 42, respectively, in a mutually coupled condition.

In a central region of the spider 2 there is a through-hole 6 which has a cylindrical surface extending coaxially with the axis X, and in which a stem 7 of a cylindrical, tubular pillar 8 with axially opposed ends indicated 7a and 7b, is housed slidably.

The sliding of the pillar 8 in the through-hole 6 can be locked in an adjustable position by means of a brake 9, preferably of the type with a cam 11 and a pad 12, operated by means of an operating lever 10.

5 The tripod 1 comprises a head 4 with a ball joint and means for fixing it to the end 7a of the stem 7. The fixing means comprise a collet 19 with four jaws 20 housed inside a sleeve 21 with a frusto-conical opening 22, driven into the end 7a of the stem 7.

10 The head 4 comprises a spherical element 15 from which a rod 16 extends, the rod 16 carrying a ring nut 17 on which the preselected apparatus (not shown) is releasably restrained, for example, by means of a threaded appendage 18. The spherical element 15 is housed in the collet 19 and, according to the degree of tightening of the elements 20, can or cannot rotate in order to achieve the desired orientation of the apparatus.

A tie rod 23 has an end 23a in abutment with a base 24 of the collet 19.

15 In order to adjust the orientation of the head 4, means for adjusting the tension of the tie rod 23 are provided and include a knob 27 which is engaged by the screwing of a female thread 30 thereof onto a threaded end 23b of the tie rod. A guide bush 25 is driven into the end 7b of the stem 7, partially projecting therefrom to define an abutment surface 26 for the knob 27.

20 An axial hole 13 formed in the guide bush 25 has channels 28 which are engaged by flat portions 29a, 29b of the tie rod 23, which is consequently guided in the hole 13 in a non-rotatable manner.

The tensioning of the tie rod 23 caused by the screwing of the knob 27 exerts on the collet 19 a pull which, because of the frustoconical shape of the opening 22, clamps the jaws 20 of the collet 19 onto the spherical element 15 so  
25 that the head 4 is thus locked in the preselected orientation. If the knob 27 is slackened, the head 4 is freely orientable.

In order for the tie rod 23 to be tensioned slightly, even when the knob 27 is fully slackened (or even removed to permit removal of the stem from the spider),  
30 means for preloading the collet system are provided and comprise a spring 31 interposed between a ring 32 fixed to the tie rod 23 and a shoulder 33 formed in the bush 25.

When the tripod 1 is in the operative, "opened-out" position, it can adopt a configuration of maximum extent in which the legs 3 are in the most extended  
35 position and the pillar 8 is slid out of the hole 6 in the spider 2 to the maximum extent.

The extension and positioning of the legs 3 in the opened-out position are performed conventionally by operating the clamps 5 and pivoting the legs about the appendages 34.

The preselected apparatus is mounted on the threaded appendage 18 and is oriented by slackening of the knob 27, and consequently of the tie rod 23, so that the collet 19 loosens its grip on the spherical element 15 so that it can adopt different orientations. Even if the knob is accidentally slackened too much, the tie rod 23 nevertheless maintains a minimum tensioning condition by virtue of the spring 31, so that sudden and uncontrolled oscillations of the head and possible damage to the apparatus fixed thereto are prevented.

When the desired position has been reached, the knob 27 is tightened to lock the ball joint in the position reached and the height of the pillar 8 is then adjusted by means of the operating lever 10, whilst the preselected orientation of the ring nut 17 is maintained.

In order to close up the tripod, once the apparatus has been removed from the head 4 and the legs have been closed up by telescopic retraction of the sections into one another, the knob 27 is slackened, leaving the head 4 free to oscillate. By operation of the operating lever 10, the pillar 8 is translated to a position of minimum extent in which the end 7a of the stem 7 of the pillar 8 is housed in the hole 6. At the end of its travel, part of the head 4, in particular, the spherical element 15 and the rod 16, are also housed inside the hole 6. The ring nut 17 is brought into abutment with the spider 2, with the function of a stop for preventing loss of the pillar 8, which is restrained by the spider, between the ring nut 17 and the knob 27.

The invention thus solves the problem posed, affording many advantages over the prior art mentioned.

A first advantage is that the tripod is extremely compact in the closed-up condition, by virtue of the fact that the head, which usually projects from the spider, can be introduced into the hole in the spider.

The fact that the head can be housed in the spider also simplifies the construction of the pillar since an attachment for the head, which also projects from the spider in conventional tripods, is no longer provided.

In addition, even though the tripod has extremely compact dimensions when closed up, its vertical extent when opened out is not compromised, since there is no limitation to the extension of the legs or of the pillar.

Moreover, even though the head is housed in the hole in the spider, it can nevertheless be operated easily since the controls for the orientation and



adjustment of the head are located at the opposite end of the pillar, and are thus easily accessible.

Claims

1. A tripod (1) for supporting apparatus in general and, in particular, for optical or photographic apparatus and the like, comprising a spider (2), a pillar (8) arranged to be housed with a stem (7) thereof in a through-hole (6) formed through the spider (2), and a head (4) arranged for receiving the apparatus, the head (4) being connected to a first end (7a) of the pillar (8), characterized in that, in the closed-up condition, that is, in the most compact condition of the tripod (1), the head (4) is at least partially housed inside the through-hole (6).
2. A tripod according to Claim 1, comprising means for adjusting the orientation of the head (4), the adjustment means being fixed to a second end (7b) of the stem (7), axially remote from the first end (7a).
3. A tripod according to Claim 1 or Claim 2 in which the head comprises a spherical element (15) and a collet (19) housed inside the stem (7) in the region of the first end (7a), the collet (19) being active on the spherical element (15) in order to clamp it selectively, relative to the stem.
4. A tripod according to Claim 3 in which the head (4) comprises a ring nut (17) mounted on the spherical element (15) and such that, when the tripod (1) is in the closed-up condition, the ring nut (17) is in abutment with the spider (2) and the spherical element (15) is housed inside the hole (6).
5. A tripod according to Claim 3 or Claim 4, comprising a sleeve (21) with a frustoconical opening (22), driven into the first end (7a) of the stem (7), the collet (19) being housed inside the sleeve (21) and cooperating with the frustoconical opening for the clamping of the spherical element.
6. A tripod according to one or more of Claims 3 to 5 in which the means for adjusting the orientation of the head (4) comprise a tie rod (23) associated, by means of a first (23a) of its ends, with the collet (19) in order, when tensioned, to lock the relative rotation of the spherical element (15) inside the collet (19).
7. A tripod according to Claim 6 in which the means for adjusting the orientation of the head (4) comprise a knob (27) in abutment with the second end (7b) of the stem (7), the tie rod (23) being disposed inside the stem (7) and being connected, by means of a second (23b) of its ends, to the knob (27), for the adjustment of the tensioning of the tie rod (23).
8. A tripod according to Claim 7 in which the knob (27) comprises a female thread (30) in which the second threaded end (23b) of the tie rod (23) is engaged by screwing, so that rotation of the knob (27) varies the tensioning of the tie rod (23) and consequently the clamping of the collet (19) onto the head (4).

9. A tripod according to Claim 7 or Claim 8 in which the means for adjusting the orientation of the head (4) comprise a guide bush (25) driven into the second end (7b) of the stem (7), the tie rod (23) being guided in the bush (25) in a non-rotatable manner.

5        10. A tripod according to one or more of Claims 6 to 9 in which axial preloading means are provided on the tie rod (23), so that the tie rod (23) is tensioned, even when the knob (27) is fully slackened, ensuring a minimal clamping of the collet (19) onto the spherical element (15).

10       11. A tripod according to Claim 10 in which the preloading means comprise resilient means (31) interposed between the tie rod (23) and the bush (25).

12. A tripod according to one or more of the preceding claims, comprising means for locking the sliding of the pillar (8), the locking means including a brake (9) acting on the pillar (8).


15       13. A tripod according to Claim 12 in which the brake (9) comprises an operating lever (10) terminating in a cam-like eccentric element (11) operating on a pad (12) movable radially in a seat formed in the spider (2) in a manner such that the pressure of the pad (12) on the pillar (8) is determined by the position of the operating lever (10).

20       14. A tripod according to one or more of the preceding claims in which each of the legs (3) is articulated to the spider (2) by a respective first section (3a), by means of a respective appendage (34) projecting radially from an end of the first section (3a), without occupying space inside the section (3a).

25       15. A tripod according to Claim 14 in which the appendage (34) is formed integrally on a sleeve (40) fitted firmly on the first section, each appendage (34) being housed in a respective seat (36) formed in the spider for the articulation of the leg (3).

30       16. A tripod according to Claim 15 in which the appendage (34) and the seat (36) are provided with respective complementary restraining means by means of which the appendage (34) is rotatable but restrained axially in the seat (36).

1/3

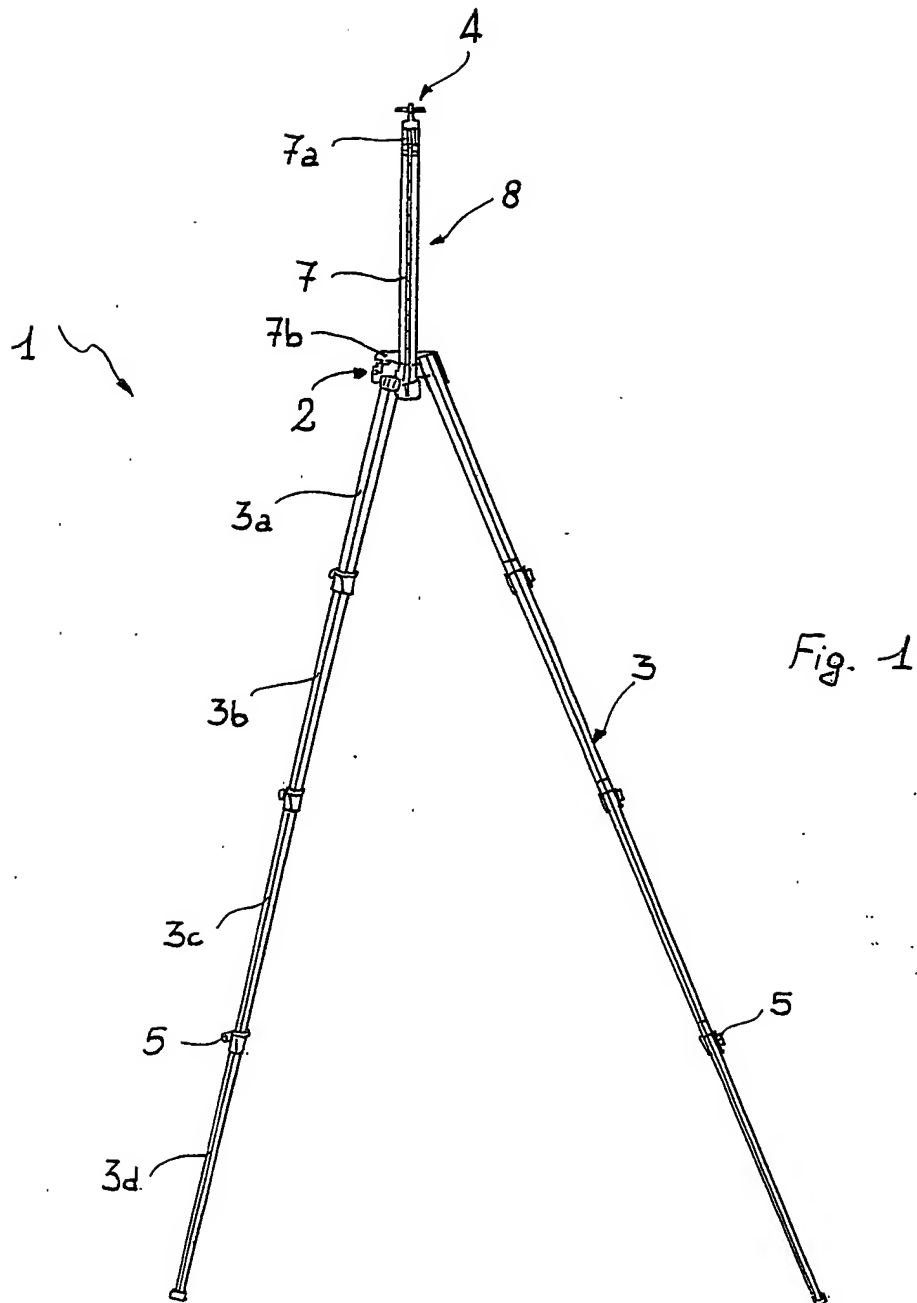

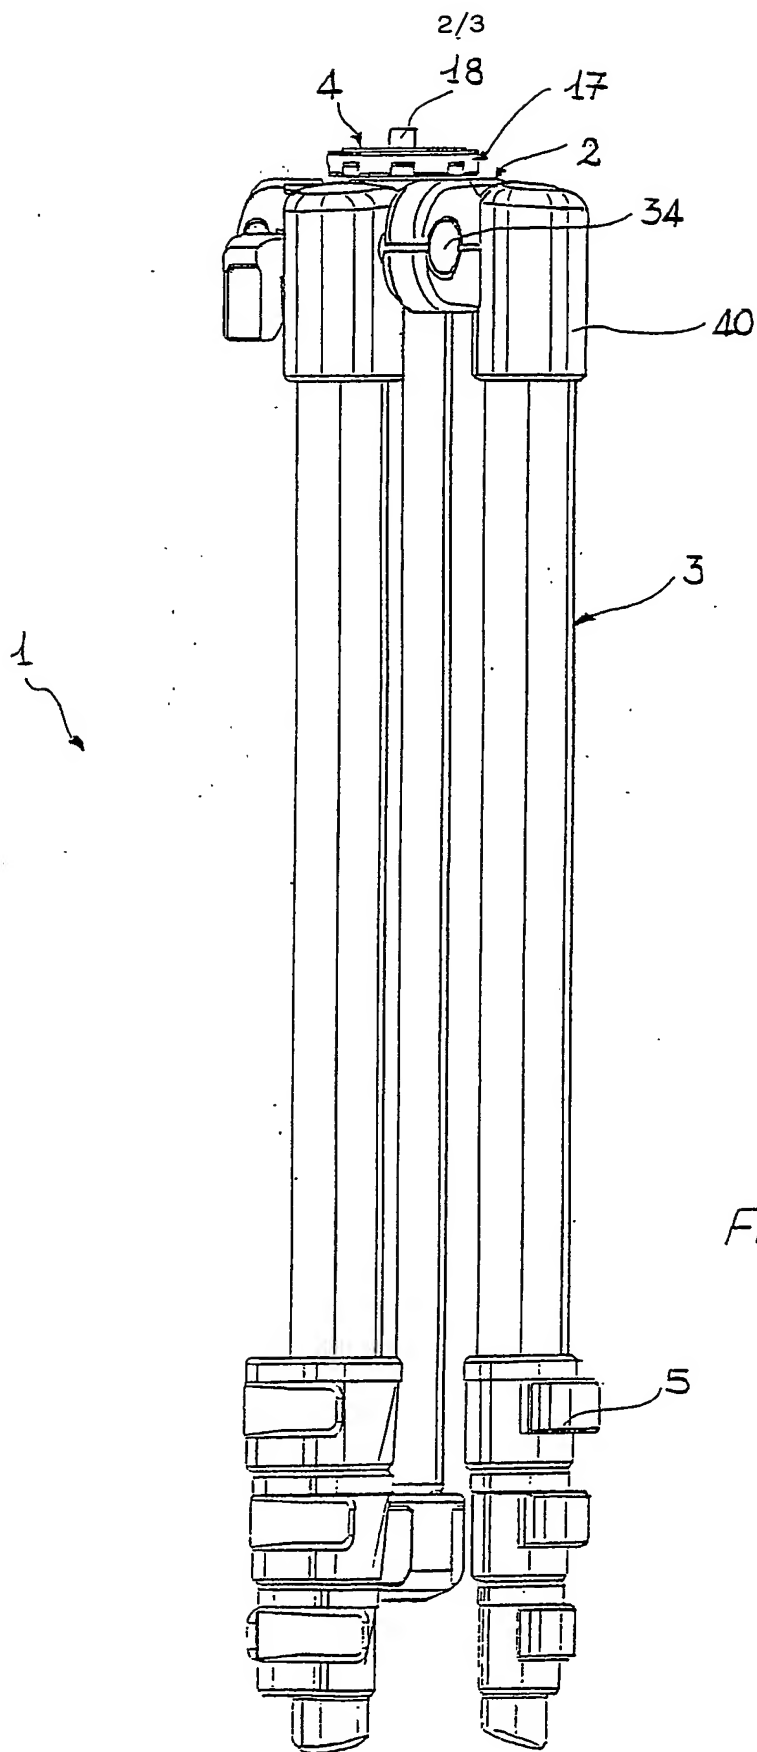


Fig. 2

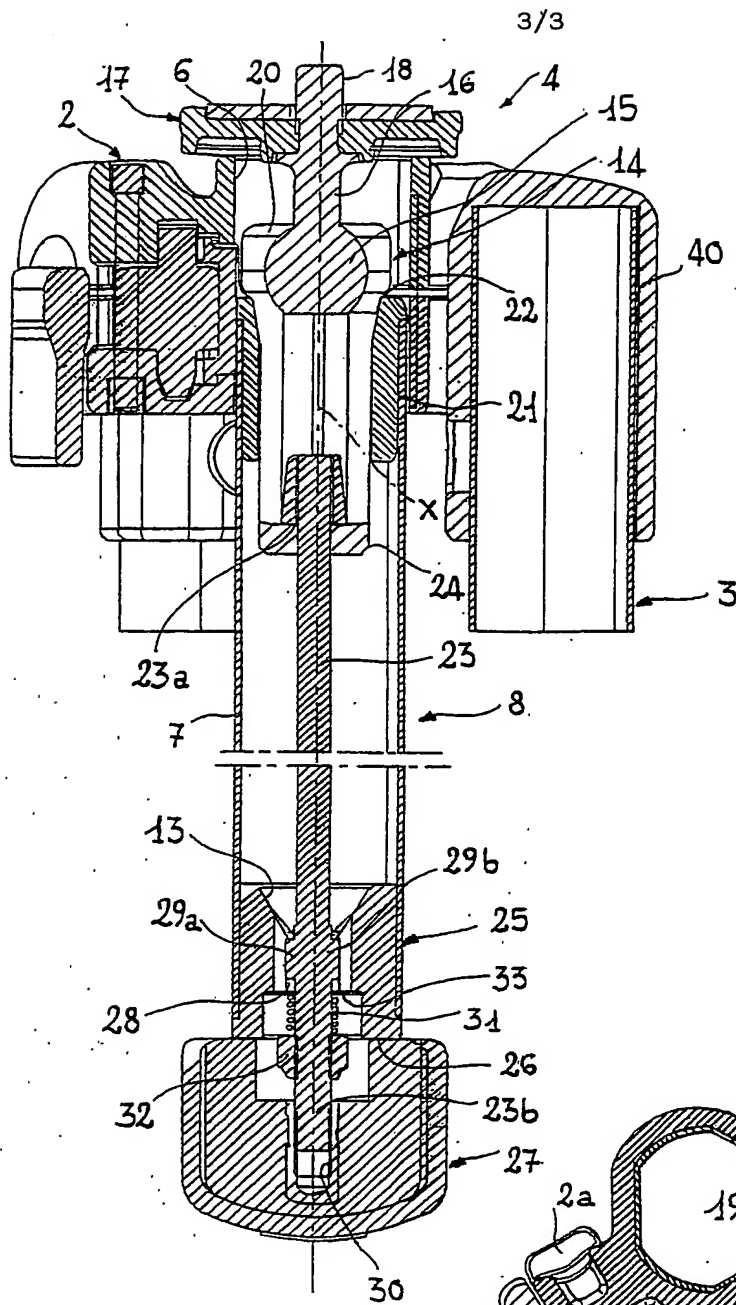


Fig. 3

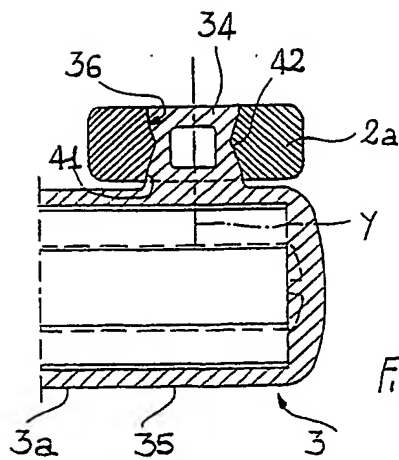


Fig. 5

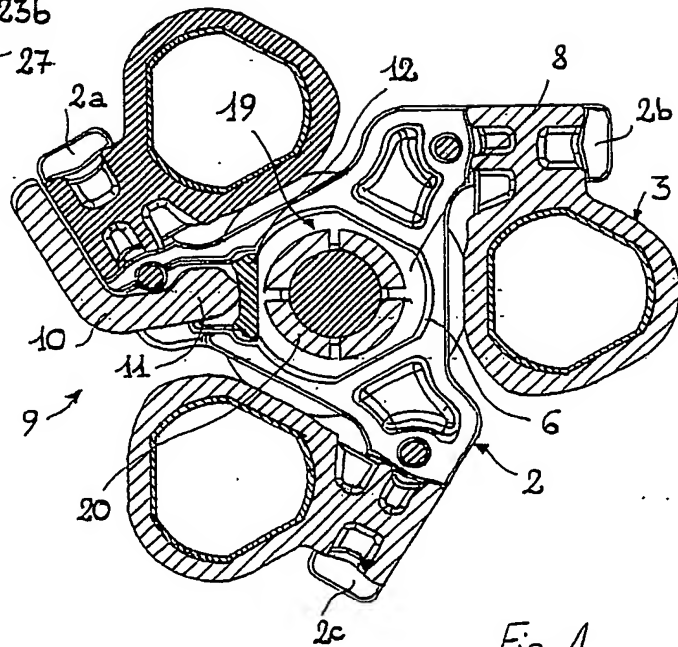


Fig. 4

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 02/00503

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 F16M11/32 F16M11/14

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 F16M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 923 478 A (LAPORTE ALBERT) 8 July 1947 (1947-07-08) the whole document ----	1,2
X	FR 756 476 A (FIAMBERTI VITTO) 11 December 1933 (1933-12-11) the whole document ----	1
A	----	4
A	DE 837 610 C (ULRICH FEIT) 28 April 1952 (1952-04-28) the whole document ----	1,2
A	CH 366 676 A (LINHOF NIKOLAUS KARP KG PRAEZ) 15 January 1963 (1963-01-15) page 2, line 26 - line 32; figures 1,2 ----- -/--	1,2,12

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

24 March 2003

Date of mailing of the international search report

31/03/2003

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Baron, C

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 02/00503

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 122 486 A (NIHON VELBON SEIKI KOGYO) 8 August 2001 (2001-08-08) cited in the application column 6, line 17 - line 38; figures 1,5 -----	1,13
A	FR 509 657 A (CONTREMOULINS GASTON-ANDRE-GAB) 17 November 1920 (1920-11-17) page 1, line 45 - line 52; figure 3 -----	2
A	FR 1 064 065 A (ELOY & CIE ETS) 11 May 1954 (1954-05-11) page 1, left-hand column, line 1 -right-hand column, line 22; figures 1-4 -----	3
A	US 5 390 885 A (SHEN JACK) 21 February 1995 (1995-02-21) column 3, line 3 - line 26; figure 1 -----	14-16
A	US 5 341 185 A (NAKATANI KOICHIRO) 23 August 1994 (1994-08-23) -----	
A	US 2 940 708 A (ADOLF GRIMAL) 14 June 1960 (1960-06-14) -----	



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 02/00503

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 923478	A	08-07-1947	NONE	
FR 756476	A	11-12-1933	NONE	
DE 837610	C	28-04-1952	NONE	
CH 366676	A	15-01-1963	NONE	
EP 1122486	A	08-08-2001	JP 2001065786 A EP 1122486 A1 CN 1331787 T WO 0114785 A1	16-03-2001 08-08-2001 16-01-2002 01-03-2001
FR 509657	A	17-11-1920	NONE	
FR 1064065	A	11-05-1954	NONE	
US 5390885	A	21-02-1995	NONE	
US 5341185	A	23-08-1994	JP 5069495 U CA 2090533 A1	21-09-1993 27-08-1993
US 2940708	A	14-06-1960	NONE	